

PRODUCT SPECIFICATIONS

Construction:

- Aluminum Housing + Front Frame, Integral Heat Sinking + Driver Compartments
- Photocell Adaptable
- Nickel-Plated Stainless Steel Hardware
- Bronze Textured Powdercoat Finish
- Tempered Clear Flat Or Clear Flat Prismatic Glass Lens
- Mounting Options Listed Below

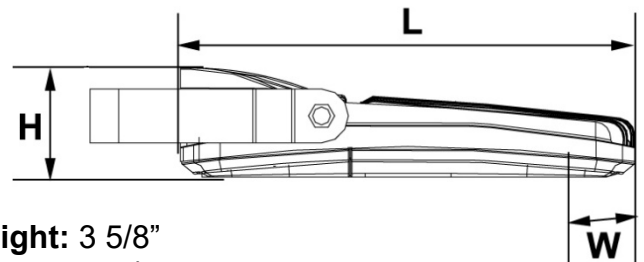
Light Source:

- LED 81 Watts Or 112 Watts
- 4000°K Or 5000°K
- Dimmable Driver
- 120-277V

Notes:

- Listed For Wet Locations
- IP65 Sealed LED Compartment
- Operating Temperatures -40°C To +40°C

JOB NAME:	
TYPE:	

**Height:** 3 5/8"**Width:** 13 3/8"**Length:** 15"

Ordering Information

Example: SL-KHA-81LED-40K-A-C

SL-KHA					BRZ		
---------------	--	--	--	--	------------	--	--

SERIES	WATTAGE	COLOR TEMP	OPTICS	Lens	FINISH	MOUNTING	OPTIONS
--------	---------	------------	--------	------	--------	----------	---------

SL-KHA	81LED 112LED	40K-4000K 50K-5000K	A-Type I B-Type II C-Type III D-Type V	C-Clear Flat Glass Lens P-Clear Flat Prismatic Lens* *Only For Type V Optic	BRZ- Bronze	KA-Kitty Hawk Arm SP-Slipfitter MA-Mounting Arm Adapter Y-Yoke BR-Two Piece Swivel Bracket EH-Easy Hang Wall NM-No Mount	EM- 90 Minute Emergency Battery Backup SF-Single Fuse DF-Double Fuse SP-Surge Protection
--------	-----------------	------------------------	---	--	----------------	--	--

425 North Fox Street San Fernando, CA 91340
 (818) 365-8900 FAX (818) 365-2519
www.southlandlighting.net

SOUTHLAND
L I G H T I N G