

**PRODUCT SPECIFICATIONS**

**Construction:**

- Air-Tight Standard. Tested To Meet Current Energy Codes. Aluminum Housing With Galvanized Steel Pan. Galvanized Bar Hangers Span Up To 24" O.C. And Feature Stepped Shank Nail And Positioning Guide With Integral T-Bar Locks. Two Locking Screws Hold Fixture In Position. Trim Retention Is Achieved By Utilizing Two Side Mounted Torsion Springs On The Trim And Two Receiving Brackets In The Can Ensuring A Consistently Tight Fit With The Ceiling. Galvanized Steel Junction Box With Four Built-In Romex Clamps; Four 1/2" And Two 3/4" Knockouts With Slots For Pry-Out. Rated For 90°C. Ground Wire Provided. Removable J-Box Doors For Easy Access. Vertical Adjustment Of Housing Allows For Flush Mounting With Ceiling Face.


**Light Source:**

- Quick Connect Accepts LED Trim.

**Notes:**

- Recessed Housing Rated IC And Non IC. Approved For All Ceiling And Wiring Types. Approved For Direct Contact To Insulation.
- Suitable To Ceilings Up To 1 1/2" Thick.
- Suitable For Damp Locations (Wet With Approved Trim).
- Trim Sold Separately.
- CEC Listing Approval (Scan Barcode)

JOB NAME:	
TYPE:	

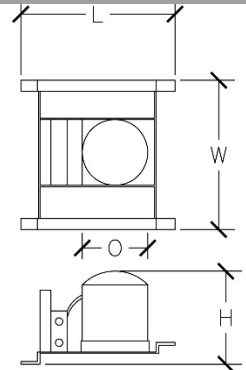

**Height:** 7 1/2"  
**Length:** 14 1/8"  
**Width:** 13 5/8"  
**Opening:** 6"

**Ordering Information**

Example: SL-RCLED6

<b>SL-RC</b>	<b>LED</b>	<b>6"</b>	<b>120</b>
--------------	------------	-----------	------------

SERIES	Lamps	SIZE	VOLTAGE
--------	-------	------	---------

SL-RC	LED	6"	120
-------	-----	----	-----



425 North Fox Street San Fernando, CA 91340  
(818) 365-8900 FAX (818) 365-2519  
www.southlandlighting.net

