

PRODUCT SPECIFICATIONS

Construction:

- Low Profile Housing
- 2" Diameter Knockout For Mounting
- High Gloss Powder Coat Finish
- Snap Together Components
- Unbreakable 100% UV Stabilized Polycarbonate Lens
- Cold Rolled Steel Housing
- Aluminum Heat Sink For Superior Heat Dissipation
- Isolated LED Driver
- Hinged Gear Tray For Easy Installation


Light Source:

- 40 Watts LED With 4000 Lumens Or 60 Watts LED With 6000 Lumens
- 5000K +80CRI
- Epistar 2835 LED Chips
- 100-277V AC Multi-Volt
- For Use In Damp Locations Between -22°F To 122°F (-30°C To 50°C)

Notes:

- Wall Or Ceiling Mount
- 5 Year Warranty
- 0-10V Dimming Option
- 90 Minute Emergency Battery Backup Option
- Motion Sensor Option

JOB NAME:	
TYPE:	

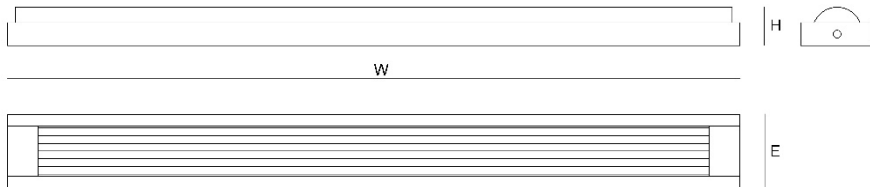

Width: 48"
Height: 2 1/2"
Extension: 4 3/4"

Ordering Information

Example: SL-STLED440-D

SL-ST		48"			
--------------	--	------------	--	--	--

SERIES	WATTAGE	SIZE	Dimming	Emergency	OPTIONS
--------	---------	------	---------	-----------	---------

SL-ST	LED440- 40 Watts LED 4000 Lumens LED460- 60 Watts LED 6000 Lumens	48"	D- 0-10V Dimming	EM- 90 Minute Emergency Battery Backup	MS- Microwave Sensor (LED440 Only)
-------	--	-----	------------------	--	------------------------------------



425 North Fox Street San Fernando, CA 91340
(818) 365-8900 FAX (818) 365-2519
www.southlandlighting.net

