

PRODUCT SPECIFICATIONS

Construction:

- Aluminum And Temper Glass Housing
- Powder Coat Dark Bronze Finish
- Front Shield Option
- 1/2" Hubs For Mounting Versatility
- 120° Beam Angle
- Includes Mounting Hardware
- Wide Forward Throw Distribution


Light Source:

- LED 80 Watts 7200 Lumens
- 3000°K, Or 5000°K Color Temperature
- CRI >80

Notes:

- 70.000 Hour Rated Life
- Wet Location IP65

JOB NAME:	
TYPE:	

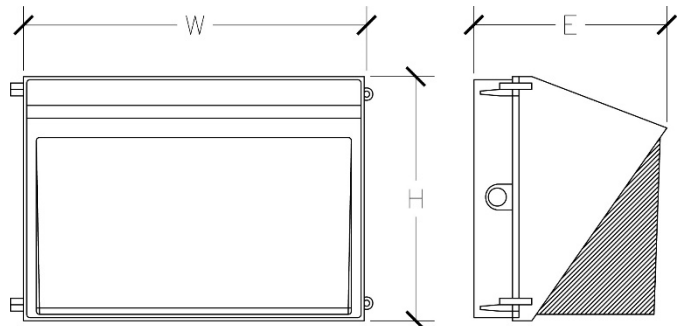

Width: 13 1/4"
Height: 9 1/2"
Extension: 7 1/2"

Ordering Information

Example: SL-WP-80LED-50K

SL-WP	80LED		120-277	DB	
--------------	--------------	--	----------------	-----------	--

SERIES	WATTAGE	COLOR TEMP.	VOLTAGE	OPTIONS	SHIELD
--------	---------	-------------	---------	---------	--------

SL-WP	80LED 7200 Lumens	30K-3000K 50K-5000K	120-277	DB-Dark Bronze	WP-FC-Front Shield
-------	-------------------	------------------------	---------	-------------------	-----------------------