

**PRODUCT SPECIFICATIONS**

**Construction:**

- Aluminum Housing With Flush Mount Base & Vandal-Resistant Screws
- Flat Top With Internal Louvers
- Internal Ballast Tray For Easy Maintenance
- Bollards Can be Cut To Custom Lengths Upon Request
- Bronze Textured Powdercoat Finish
- Mounting Kit With 8" Anchor Bolts Included
- Clear Polycarbonate Vandal-Resistant Lens
- Wide Beam Spread


**Light Source:**

- LED 15 Watts
- 4000°K 747 Lumens Or 5000°K 778 Lumens
- Dimmable Driver
- 120-277v

**Notes:**

- Listed For Wet Locations
- IP65 Sealed LED Compartment
- Operating Temperatures -40°C To +40°C
- 90 Minute Emergency Battery Backup Option

JOB NAME:	
TYPE:	

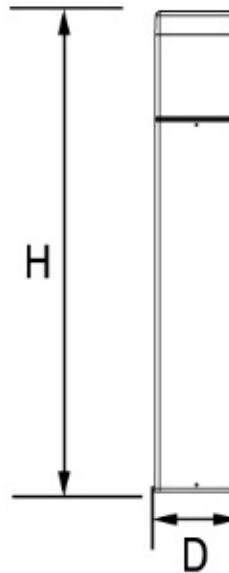

**Height:** 41 3/8"  
**Diameter:** 7"

**Ordering Information**

Example: SL-BSF-15LED-40K

<b>SL-BSF</b>	<b>15LED</b>		<b>120-277</b>	<b>BRZ</b>	
---------------	--------------	--	----------------	------------	--

SERIES	WATTAGE	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
--------	---------	------------	---------	--------	---------

SL-BSF	15 LED	40K-4000K 747 Lumens 50K-5000K 778 Lumens	120-277	BRZ- Bronze	EM- 90 Minute Emergency Battery Backup SF-Single Fuse DF-Double Fuse SP-Surge Protection
--------	--------	----------------------------------------------	---------	-------------	---------------------------------------------------------------------------------------------------

425 North Fox Street San Fernando, CA 91340  
(818) 365-8900 FAX (818) 365-2519  
www.southlandlighting.net